



FILTER CARTRIDGE

WODA-PURE MINERALIZER XL MG + CUF PROTECT



MAGNESIUM MINERALIZED WATER, RELIABLE LIMESCALE PROTECTION AND ULTIMATE HYGIENIC SAFETY


Specially developed for hard water regions ≥ 6 °dH, the BWT Woda-Pure Mineralizer XL Mg+CUF PROTECT serves as an all-round filter cartridge that transforms local tap water into perfectly refreshing drinking water.



The patented BWT Magnesium Technology enriches filtered water with valuable magnesium minerals, enhancing the taste of beverages like tea and coffee, while also supporting the body's energy needs.

Different filter stages reduce particles and unpleasant substances such as chlorine, which can affect odour and taste. Specially developed for areas with hard water, it also protects your kitchen appliances from limescale deposits. An integrated ultrafiltration membrane retains 99.999% of all bacteria and reduces microplastics up to 1µm for maximum hygienic safety.

Your drinking water is refined through five filtration levels into Magnesium Mineralized Water:

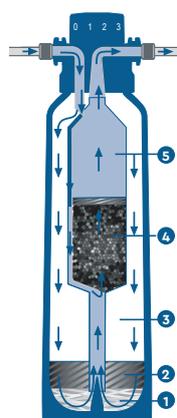

- 1. Primary filtration** filters particles, e. g. sand or rust.
- 2. Active carbon pre-filtration** reduces substances of bad taste and odour.
- 3. Powerful ion exchanger** removes water hardness to protect from limescale and provides the essential mineral magnesium.
- 4. Activated-carbon filtration** reduces chlorine and other impurities that cause unpleasant smell and taste
- 5. Ultrafiltration technology** retains bacteria and removes even the tiniest particles, such as microplastics.



HYGIENICALLY SAFE



LIMESCALE PROTECTION



PERFECT TASTE



NO MORE PLASTIC BOTTLES



Invisible installation directly under the sink, so nothing disturbs the countertop or your kitchen design.

BWT Woda-Pure Mineralizer XL Mg + CUF PROTECT can be easily combined with the other Woda-Pure cartridges.



TECHNICAL DATA

WODA-PURE MINERALIZER XL MG + CUF PROTECT		FOR HARD WATER ≥ 6 °dH
Connection width	DN	10 (3/8")
Max. flow rate	l/h (gpm)	200 (0.88)
Operating pressure min. - max.	bar (psi)	2 - 8 (29 - 116)
Filter capacity	litre	up to 2,250 l*
Operating temperature water, min.- max.	°C (°F)	4 to 30 (+39 to +86)
Overall height with filter head and fixture	mm	527
Overall height without filter head and fixture	mm	502
Filter cartridge Ø	mm	147
Operating position		horizontal / vertical**
Order no. Filter Head Magnesium with bypass		12580
Order no. Cartridge		125595499

*Filter capacity depends on water hardness level - please see product manual for more information.

**We recommend vertical installations.



BWT Wassertechnik GmbH

Industriestrasse 7, 69198 Schriesheim, Germany

T: +49 (0) 6203 7373 | M: export@bwt.de