



Filter cartridge

Woda-Pure Mineralizer MG + CUF CARE



Hygienically pure and Magnesium mineralized water at its best!

This versatile cartridge has been specially developed for regions with soft water ≤ 5 °dH or for use after a domestic water softening system.


The BWT Woda-Pure Mineralizer Mg + CUF CARE transforms local tap water into a delicious, mineralized, and hygienically pure drinking experience - an ideal complement for a healthy lifestyle.



The patented BWT Magnesium Technology enriches filtered water with valuable magnesium minerals, enhancing the taste of beverages like tea and coffee, while also supporting the body's energy needs.

Multiple filter stages effectively remove dirt particles and unwanted elements such as chlorine, which is known to affect both the smell and taste of water. The built-in ultrafiltration membrane eliminates 99.999 % of bacteria and minimizes microplastics up to 1 μm , ensuring maximum hygienic safety.

Your drinking water is refined through five filtration levels into Magnesium Mineralized Water:

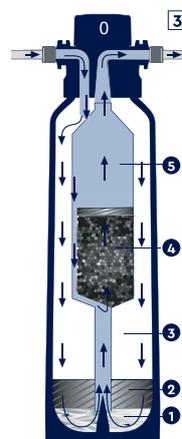

- 1. Primary filtration**
filters particles, e. g. sand or rust.
- 2. Active carbon pre-filtration**
reduces substances of bad taste and odour.
- 3. Powerful ion exchanger**
decarbonization and mineralisation with magnesium
- 4. Activated-carbon filtration**
reduces chlorine and other impurities that cause unpleasant smell and taste
- 5. Ultrafiltration technology**
retains bacteria and removes even the tiniest particles, such as microplastics.



HYGIENICALLY SAFE



BETTER PERFORMANCE



NO MORE PLASTIC BOTTLES



Invisible installation directly under the sink, so nothing disturbs the countertop or your kitchen design.

BWT Woda-Pure Mineralizer Mg + CUF CARE can be easily combined with the other Woda-Pure cartridges.



BWT Woda-Pure: the modular hygienic system!

Technical data

Woda-Pure Mineralizer MG + CUF CARE FOR SOFT AND SOFTEND WATER ≤ 5 °DH		V	M
Connection width	DN	10 (3/8")	
Max. flow rate	l/h (gpm)	200 (0.88)	
Operating pressure min. - max.	bar (psi)	2 - 8 (29 - 116)	
Filter capacity	litre	up to 2,000 l*	up to 5,000 l*
Operating temperature water, min.- max.	°C (°F)	4 to 30 (+39 to +86)	
Overall height with filter head and fixture	mm	446	502
Overall height without filter head and fixture	mm	421	477
Filter cartridge Ø	mm	110	130
Operating position		horizontal / vertical**	
Order no. Magnesium Filter Head		12580	
Order no. Filter Cartridge		125666108	125595500

*Filter capacity depends on water hardness level - please see product manual for more information.

**We recommend vertical installations.



BWT Wassertechnik GmbH

Industriestrasse 7, 69198 Schriesheim, Germany

T: +49 (0) 6203 7373 | M: export@bwt.de